



TECHNICAL INFORMATION / corkart.pt

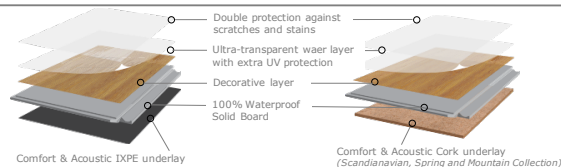

Waterproof floating floors with super resistant board.
Perfect for large areas up to 400 m², no joints required.
Available in long plank and herringbone format.

TEST	STANDARD	VINYL2GO! COLLECTION	TREND COLLECTION	METROPOLITAN COLLECTION	SCANDINAVIAN COLLECTION	SPRING COLLECTION	MOUNTAIN COLLECTION	RIVER COLLECTION	BEACH COLLECTION	POWER COLLECTION
Category		Start Pro 50.55	Essential 55.30	Essential Pro 55.55	Premium Cork Pro 60.55	Premium Cork Pro 60.55	Premium Cork Pro 60.55	Ultra Pro 65.55	Ultra Pro 65.55	Spartan Xtreme 70.70
Dimensions	EN 427 / EN 428	1230 x 228 x 5 mm (inclu camada de 1mm IXPE)	1230 x 228 x 5,5 mm (including 1mm IXPE underlay)	1230 x 228 x 5,5 mm (including 1mm IXPE underlay)	1230 x 228 x 6 mm (including 1mm cork underlay)	1500 x 228 x 6 mm (including 1mm cork underlay)	1500 x 228 x 6 mm (including 1mm cork underlay)	1500 x 228 x 6,5 mm (including 1mm IXPE underlay)	1500 x 228 x 6,5 mm (including 1mm IXPE underlay)	1800 x 228 x 7 mm (including 1mm IXPE underlay) 750 x 150 x 7 mm Herringbone (including 1mm IXPE underlay)
Emboss / Surface		Regular Wood Semi-matte	Regular Wood Semi-matte	Regular Wood Semi-matte	Regular Wood Semi-matte	Realistic Wood Semi-matte	Regular Wood Semi-matte	Regular Wood Semi-matte	Realistic Wood Semi-matte	Realistic Wood Semi-matte
Impact Sound Reduction	EN 140	18 dB	18 dB	18 dB	16 dB	16 dB	16 dB	18 dB	18 dB	18 dB
Suitable for	EN 16511	Residential / Commercial Light	Residential / Commercial Light	Residential / Commercial Light	Residential / Very High	Residential / Very High	Residential / Very High	Residential / Very High	Residential / Very High	Residential / Very High
Weight	EN 430	8,15 kg/m ²	9,36 kg/m ²	9,36 kg/m ²	9,36 kg/m ²	9,36 kg/m ²	9,36 kg/m ²	9,36 kg/m ²	9,36 kg/m ²	9,36 kg/m ²
Fire Performance	EN 13501	Bfl - s1	Bfl - s1	Bfl - s1	Bfl - s1	Bfl - s1	Bfl - s1	Bfl - s1	Bfl - s1	Bfl - s1
Anti-Sliding Properties	EN 13893	Classe DS	Class DS	Class DS	Class DS	Class DS	Class DS	Class DS	Class DS	Class DS
Dimensional Stability After Exposure to Heat	EN ISO 23999:2018/08	-0,05 length / 0,00 width	-0,05 length / 0,00 width	-0,05 length / 0,00 width	-0,05 length / 0,00 width	-0,05 length / 0,00 width	-0,05 length / 0,00 width	-0,05 length / 0,00 width	-0,05 length / 0,00 width	-0,05 length / 0,00 width
Static Indentation	EN ISO 24343	0,00 mm	0,00 mm	0,00 mm	0,00 mm	0,00 mm	0,00 mm	0,00 mm	0,00 mm	0,00 mm
Chemical Resistance	EN 423	Classe 0 - Bom	Class 0 - Good	Class 0 - Good	Class 0 - Good	Class 0 - Good	Class 0 - Good	Class 0 - Good	Class 0 - Good	Class 0 - Good
Anti-static Resistance	EN 1815	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV
Determination of the Effect of a Castor Chair	EN 425:2022-04	No visible change after 10.000 cycles	No visible change after 10.000 cycles	No visible change after 10.000 cycles	No visible change after 10.000 cycles	No visible change after 10.000 cycles	No visible change after 10.000 cycles	No visible change after 10.000 cycles	No visible change after 25.000 cycles	No visible change after 25.000 cycles
Microscratch Resistance	EN 16094	MSR-B1	MSR-B1	MSR-B1	MSR-B1	MSR-B1	MSR-B1	MSR-B1	MSR-B1	MSR-B1
Resistance Against Staining	EN 438-2:2016	Grupo 1, 2 e 3: grau 5	Group 1, 2 and 3: grade 5	Group 1, 2 and 3: grade 5	Group 1, 2 and 3: grade 5	Group 1, 2 and 3: grade 5	Group 1, 2 and 3: grade 5	Group 1, 2 and 3: grade 5	Group 1, 2 and 3: grade 5	Group 1, 2 and 3: grade 5
Locking strenght - short side joints - long side joints	EN ISO 10582:2018-01, Annex D	4,6 kN/m 5,5 kN/m	4,6 kN/m 5,5 kN/m	4,6 kN/m 5,5 kN/m	4,6 kN/m 5,5 kN/m	4,6 kN/m 5,5 kN/m	4,6 kN/m 5,5 kN/m	4,6 kN/m 5,5 kN/m	4,6 kN/m 5,5 kN/m	4,6 kN/m 5,5 kN/m
Underfloor Heating		Approved 27°C	Approved 27°C	Approved 27°C	Approved 27°C	Approved 27°C	Approved 27°C	Approved 27°C	Approved 27°C	Approved 27°C
Thermal Resistance	EN 12667:2001-01	0,010 (m ² K)/W	0,010 (m ² K)/W	0,010 (m ² K)/W	0,010 (m ² K)/W	0,010 (m ² K)/W	0,010 (m ² K)/W	0,010 (m ² K)/W	0,010 (m ² K)/W	0,010 (m ² K)/W
French VOC Regulation		A+	A+	A+	A+	A+	A+	A+	A+	A+
Peel Resistance	EN 1464:2010-02	2,11N/mm	2,11N/mm	2,11N/mm	2,11N/mm	2,11N/mm	2,11N/mm	2,11N/mm	2,11N/mm	2,11N/mm
Resistance to Fading	ISO 105 B02	6/8 depending on design	6/8 depending on design	6/8 depending on design	6/8 depending on design	6/8 depending on design	6/8 depending on design	6/8 depending on design	6/8 depending on design	6/8 depending on design

