
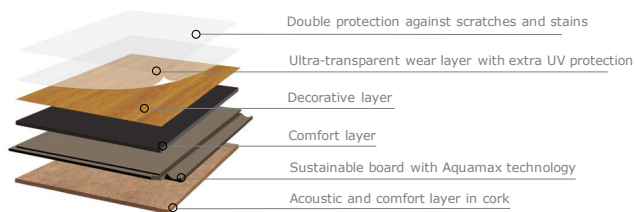


TECHNICAL INFORMATION / corkart.pt



Flooring with an ultra-resistant click system, developed for installation areas of up to 200 m² without expansion joints.
Maximum comfort and water resistance for up to 72h.

TEST	TEST METHOD
Category	
Dimensions / Thickness	EN 427 / EN 428
Emboss / Surface	
Impact Sound Reduction	EN 140
Suitable for	EN 16511
Weight	EN 430
Fire Performance	EN 13501
Anti-Sliding Properties	EN 13893
Formaldehyde Emission	EN 717-1
Content of PCP	CEN/TR 14823
Dimensional Stability After Exposure to Heat	EN ISO 23999:2012
Abrasion Resistance	EN 15468, Annex A
Static Indentation	EN ISO 24343
Resistance against impact (big ball)	EN 13329
Chemical Resistance	EN 433
Determination of the Effect of a Castor Chair	EN 425
Determination of the Effect of a Furniture Leg	EN 424
Microscratch Resistance	EN 16094
Resistance Against Staining	EN 438-2:2016
Locking strenght - short side joints - long side joints	ISO 24334:2019-07
Underfloor Heating	
Thermal Resistance	EN 12667:2001-01
Emissions Value	
Resistance to Fading	ISO 105 B02 2014-09
Water Resistance	ISO 4760:2022-05
Resistance of mechanical joints	ISO 4760:2022-05

TREND COLLECTION	SCANDINAVIAN COLLECTION	METROPOLITAN COLLECTION
Comfort Pro 83.30	Comfort Pro 86.55	Comfort Pro 86.55
1200 x 210 x 8,3 mm	1200 x 210 x 8,6 mm	1200 x 210 x 8,6 mm
Regular Wood Semi-matte	Regular Wood Semi-matte	Regular Wood Semi-matte
17 dB	17 dB	17 dB
Residential / Commercial Very High	Residential / Commercial Very High	Residential / Commercial Very High
9,36 kg/m ²	10 kg/m ²	10 kg/m ²
	Bfl - s1	
	Class DS	
	Class E1	
	Not to declare	
	-0,001	
	2500	
	0,04 mm	
	No visible change	
	Class 0	
	No visible change	
	No visible change	
	MSR-A2 / MSR-B1	
	*Coffee / H2O2 / Shoe polish: grade 5 / NaOH: grade 4 /	
	5.8 kN/m 6.9 kN/m	
	Approved 27°C	
	0,100 (m2K)/W	
	In conformity with AgBB	
	>6 no change of colour	
	Wet swell: 1 (No change) / Recovery swell: 1 (No change)	
	No water leakage through the joints after 24h water exposure	

